



**ISM 350-32S** 350 l spiral mixer, stainless steel safety cover, with two speed motor. Oil-less kneading system. Stainless steel food contact parts for hygiene. Two side returnable bowl.

**ISM 350-32S CR** 350 l spiral mixer, stainless steel safety cover, with two speed motor. Oil-less kneading system. Stainless steel food contact parts for hygiene. Two side returnable bowl. Stainless steel body.

## Specification



ISM Series spiral mixers provide very intensive, quick, homogeneous and dead spot free mixing. Spiral mixer yields very quick preparation without warming and tiring products such as dough, mincemeat, etc. The dough will result soft, well aired and easy to remove. AISI 304 stainless steel bowl, AISI 304 stainless steel spiral tool and breaking bar provides excellent mixing

## Main Features

- Dirmak equipments are designed for long-term usage under heavy duty conditions. Mixer is equipped with Stainless steel food contact parts for hygiene and mixing bowl for 350 l.
- Waterproof button control panel
- Two Speed
- Two digital timers
- Reverse bowl
- Automatic / Manuel operating system
- Strong pulley-belt system
- Silent operation
- Maximum capacity (Flour, with %60 hydration) 225 kg for bread dough.
- Safety cover in stainless steel
- Safety device will automatically stop the machine when the cover opens.
- Equipped with wheels and machine levelling feet.

## Construction

- Body painted with corrosion resistant electrostatic paint or AISI 304 Stainless steel option.
- AISI 304 Stainless steel bowl—350 l capacity.
- Asynchronous motor with high start-up torque.
- Water protected spiral system (IP54 electrical controls, IP 32 overall machine)
- Power :  
7,5-11,0 + 0,75 kW for ISM 350-32S and ISM 350-32S CR

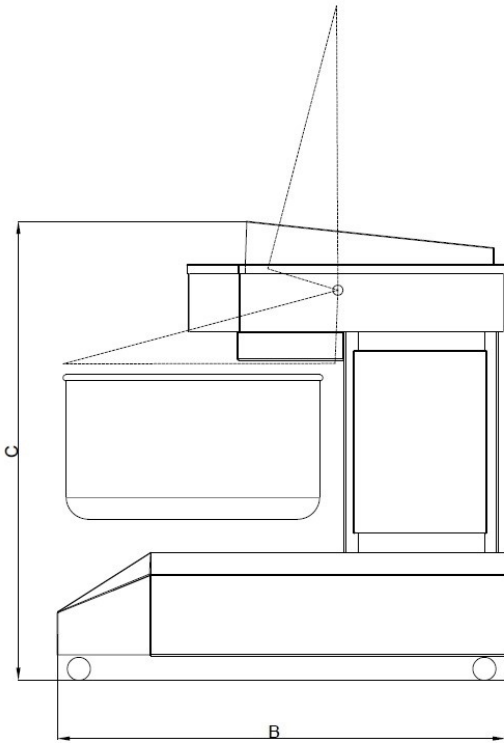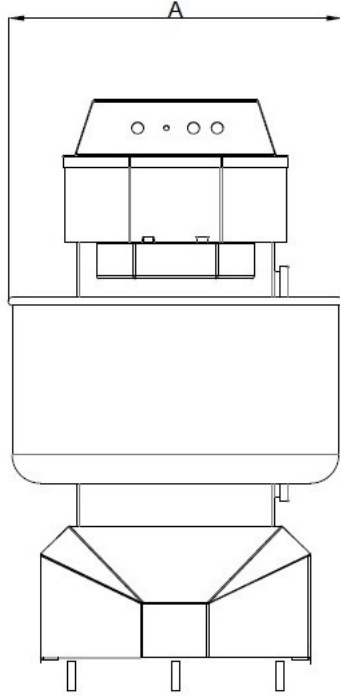

## Electric

### Supply Voltage :

ISM 350-32S 380-415 V/3P/50-60Hz

ISM 350-32S CR 380-415 V/3P/50-60Hz

### Electrical Power Max. :

ISM 350-32S CR 7,5-11,0 + 1,5 kW

## Capacity

Flour : 150 Kg / Cycle

Dough : 225 Kg / Cycle

Capacity : 350 liter

Bowl Diameter: 950 mm

## Key Information

Width (A) : 1000 mm

Depth (B) : 1600 mm

Height (C) : 1650 mm

Shipping Weight : 700 Kg

